

PNA ..F

zone 1

zone 2

EEx d IIC

EEx e II

II2GD

IP 67

 -20°C

zone 21


zone 22

 +40°C

Special Tamb.

 -40°C

Special Tamb.

 +90°C**KABLO RAKORU - CABLE GLAND****KEMA 01ATEX2240X**

Özellikleri : Zırhlı olmayan kablolar için kablo rakoru
EEx d IIC .



Features : Cable gland for unarmoured cable with wide range of Ex sealing ring : one ring for each size
They are suitable for enclosures with internal volume more than 2 litres and for EEx d IIC enclosures.

Malzemesi : Galvanizli çelik

Materials : Galvanized steel

A richiesta Nikel kaplı pirinç (D) – Paslanmaz çelik (Y) – Hafif alaşım (L)

Optional Nickel plated brass (D) - Stainless steel (Y) - Light alloy (L)

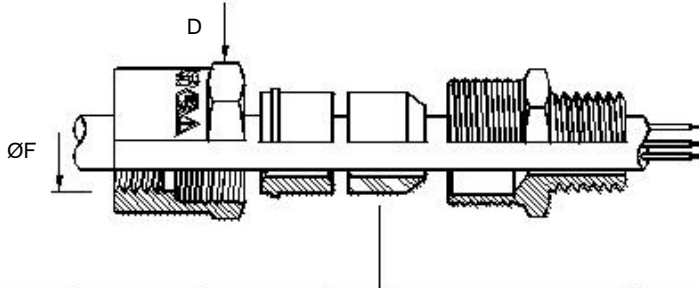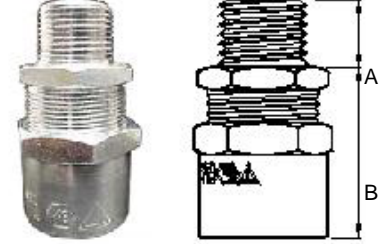

Ø"	D	A	B MAX	Type	Ø min	Ø MAX	ØF " ISO 7/1Rp	Kod Code	
1/2	28	20	57	PX 10	4	10	1/2	PNA 0F	
1/2	40	20	56	PX 12	6	12	1/2	PNA 1F	
3/4	40	20	56	PX 12	6	12	1/2	PNA 12F	
3/4	47	20	58	PX 17	9	17	3/4	PNA 2F	
1	58	26	63	PX 23	14	23	1	PNA 3F	
1 1/2	70	26	68	PX 29	19	29	1 1/2	PNA 5AF	
1 1/2	67	26	68	PX 36	28	36	1 1/2	PNA 5BF	
2	83	26	75	PX 45	34	45	2	PNA 6F	
3	108	31	80	PX 59	47	59	3	PNA 8F	

M20x1.5	28	20	57	PX 10	4	10	1/2	PNA 0FM	
M20x1.5	40	20	56	PX 12	6	12	1/2	PNA 1FM	
M25x1.5	40	20	56	PX 12	6	12	1/2	PNA 12FM	
M25x1.5	47	20	58	PX 17	9	17	3/4	PNA 2FM	
M32x1.5	58	26	63	PX 23	14	23	1	PNA 3FM	
M40x1.5	70	26	68	PX 29	19	29	1 1/2	PNA 5AFM	
M50x1.5	67	26	68	PX 36	28	36	1 1/2	PNA 5BFM	
M63x1.5	83	26	75	PX 45	34	45	2	PNA 6FM	