

EJB

zone 1

zone 2

EEx d IIB

II2G

 -20°C


zone 21

zone 22



II2GD

IP 66

 +40°C
special T amb.

EN 50014

KUMANDA ÜNİTELERİ- CONTROL UNITS

T6

T5

T4

 -50°C
special T amb.

EN 50281-1-1

KEMA 01ATEX2257


T 80°C

T 95°C

T 130°C


 +60°C

- Özellikleri : Kontrol ve kumanda üniteleri
Features : Control and command units
Malzemesi : Hafif alaşım (alüminyum)
Materials : Light alloy (aluminium)
İsteğe bağlı: Paslanmaz çelik vidalar – IP 66 conta
Optional: Stainless steel screws - gasket IP 66
Boyutlar : F1 bölümüne bakınız
Dimensions: See section F1

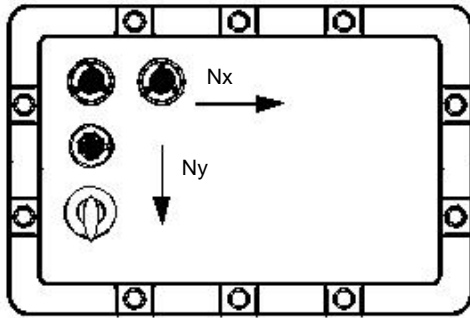

Kutu Enclosure	Nx	Ny	
EJB 544A	2	1	
EJB 755A	3	2	
EJB 1076A	4	3	
EJB 1286A	5	3	
EJB 14107A	6	4	
EJB 17129A	8	5	
EJB 221410A	10	6	

Buton / Push button

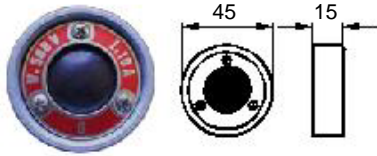

Code EFD .../C (sect. I-2)

Sinyal lambası / Signaling lamp



Code EFD ...3/C (sect. I-4)

Anahtar / Selector



Code EFD .../C (sect. I-3)

V28

zone 1

zone 2



EEx d IIC

II2G

IP 66

 -20°C

zone 21

zone 22

EEx d IIC

II2GD

IP 66

 +40°C
Special Tamb.

EEx e II


II2GD

IP 66


 -50°C
Special Tamb.**DRAIN - VALVE**

KEMA 01ATEX2269 U

- Özellikleri : Akıtıcı ve nefes alıcı vana
Features : Draining and breathing valve
Malzemesi : AISI 304 paslanmaz çelik – silikon conta
Materials : Stainless steel AISI 304 - silikon gasket
İsteğe bağlı : AISI 316 paslanmaz çelik
Optional: Stainless steel AISI 316



EEx d IIC II2G IP 66

EEx d IIC II2GD IP 66
EEx e II II2GD IP 66